



# IT 4080



## Standard equipment

- Indoor use
- Traction at maximum height
- Front hydraulic drive with electrical controls on platform. 3 selectable drive speeds.
- Negative parking brakes with hydraulic disengagement.
- 90° steering.
- Manual platform extension 0.90 m.
- Horn.
- Manual emergency lowering device.
- Cylinder holding valve.
- Battery 24 V – 205 Ah – (C5.)
- Battery charger with automatic switch-off 24 V – 40 A.
- Audible motion alarm.
- Inclinometer with motion blocking device and alarms.
- Mechanical wheel drive release for emergency hauling.
- Battery cut-out plug.
- Cushion non-marking tyres 305 x 90.
- Electrical scissor protections.
- Pothole protections.
- Battery control system with low-voltage cut-out protection.
- Hourmeter.
- Fold down railings.
- Overload sensor
- CE – EN 280 marking.


## Options

- 220-V cable with plug, socket and safety cut-out.
- Flashing beacon.
- Proportional controls with diagnostics.



## Overall dimensions

# IT 4080

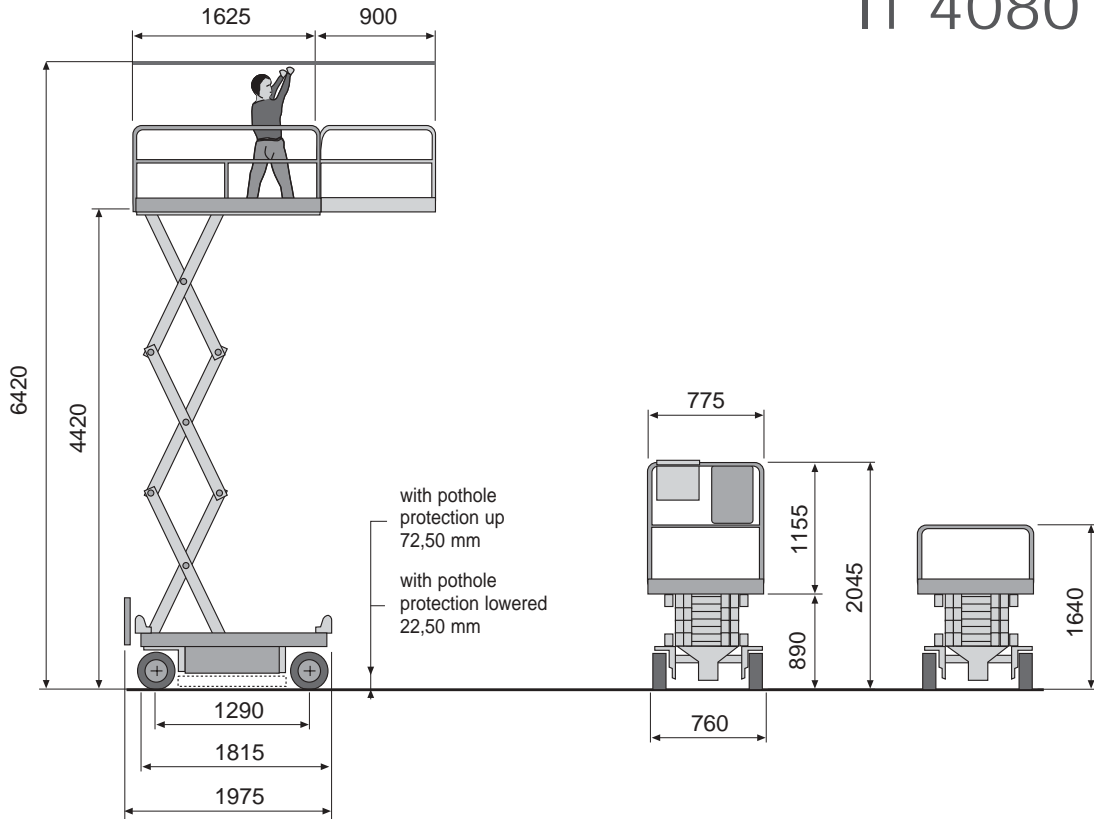

## Technical specifications

Capacity (including 2 people)	kg	200
Lift time (without load)	s	17
Lower time (with load)	s	13
DC motor operation	V/kW	24/2,10
Battery voltage	V	24
Battery capacity	Ah (C5)	205
Battery weight	kg	4x35
Battery charger	V/A	24/40
Max. hydraulic pressure	bar	200
Oil tank capacity	l	7
Traction speed (fast)	km/h	2,6
Traction speed (slow)	km/h	1,4
Traction speed ( security)	km/h	0,8
Gradeability	%	25
Inside turning radius	m	0,02
Outside turning radius	m	1,55
Tyre dimensions	mm	305x90
Tyre type		cushion
Total weight	kg	1100

*Note: data, descriptions and illustrations are not binding for Iteco S.p.A. that reserves the right to make modifications to the production without prior notice thereof.*